

Features & Benefits

- No rewiring needed
- Works with fluorescent electronic ballast (Instant Start, Programmed Start, and Dimming)*
- Long life
- High CRI
- Instant on, no delay
- Convenient and quick installation
- Utilizes existing instant start or rapid start sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Glass tube for superior optical performance
- Wide View Angle
- 5 Year Warranty
- New Version with Integrated ArmorCoat
For use in food areas and refrigerated food displays



RetroFlex™
LED T8 LAMP • Simplicity.
Commercial Grade LED T8 Lamp



* EMERGENCY BALLAST RESTRICTIONS

Specification Data

Order Code	Length	Lamp Power	System Power	CCT	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy	Life
L48T8/835/15G-EB-AC 48	16	19	19	3500	2200	82	325	135	115	50000
L48T8/840/15G-EB-AC 48	16	19	19	4000	2200	82	325	135	115	50000
L48T8/850/15G-EB-AC 48	16	19	19	5000	2200	82	325	135	115	50000

* Based on Normal Ballast Factor.

Ordering Information

EXAMPLE: **L48T8/840/15G-EB-AC**

L	48	T8	8	40	15 G	- EB	- AC
Manufacturer's Code	Normal Length 48=48"	Lamp Shape T8=T8	CRI 8=>80	CCT 50 =5000K 40 =4000K 35 =3500K	Wattage 15G-15W	Electronic Ballast Compatible	ArmorCoat Shatterproof Coating



CLD18WH/8XX-ID	
Std. Pack Qty.	50
Order Code	CLD18WH/8XX-ID

PRODUCT SPECIFICATION

COMPACT LED RETROFIT BULB


GENERAL CHARACTERISTICS

Lamp Type	Compact LED Retrofit Bulb
Voltage	120-277V
Base	G24q / G24d
Watts	11W
Rated Avg. Life (hrs)	50,000
Replacement	18W, 26W, 32W, 42W CFQ

DIMENSIONS

Overall Length (inches) (D)	5.21
Base Face to Top of Lamp (inches) (C)	4.62
Front (inches) (A)	1.02
Side (inches) (B)	1.62

Dimension Layout

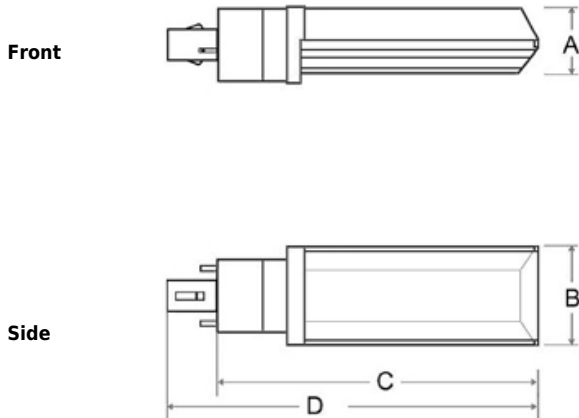

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1000
Beam Angle	120°
Color Temperature	4000K
Color Rendering Index (CRI)	83

FEATURES

- No UV, No Mercury
- Quick Installation
- High Lumen
- Extended Life
- High Quality Color Rendering
- Five Year Limited Warranty

Wiring Diagram

